






Colours available from stock:
Complete the art.nr. with the indicated colour-code
01 White
03 Silver
Other colours can be delivered on request.


 **DS Track** 20010..00 cm
Aluminium extrusion, powder coated, lubricated.
4 m (13'1"), 5 m (16'4"), 6 m (19'8"). 20/tube

 **Carrier** 10100..000
"Klickable", offset, constructed of UV resistant plastic. 10 Carriers on a break-away strip. Can be clicked in after installation. 500/box

 **Stop Carrier** 10102..000
Prevents slide back, "klickable", constructed of UV resistant plastic. 250/box


 **Master Carrier/Reversible** 1010301000
Reversible overlap carrier, "Klicks" into track, constructed of UV resistant plastic. For straight track only. White. 25/box


 **Shirrtape Carrier** 10104..000
Carrier and hook in one "klickable" unit, constructed of UV resistant plastic. For sew on drapery tape. 500/box


 **Carrier with Metal Hook** 10105..000
"Klickable", offset, with stainless steel hook, constructed of UV resistant plastic. For use with grommets. 100/box


 **Twist End Stop** 10162..000
"Twists" into track, with metal plate, constructed of UV resistant plastic. 100/box


 **Twist End Stop with Cap** 20163..000
"Twists" into track, with metal plate and end cap, constructed of UV resistant plastic. 100/box


 **Wall Support** 25/box
2,5 x 5 cm (1"x2") return plate, powder coated. Right
Left 10166..000
10167..000


 **Ceiling Bracket** 10180..000
Slides onto the track, powder coated. Regular duty. 100/box


 **Ceiling Bracket with Slot** 10181..000
Slides onto the track, powder coated. Regular duty. 100/box


 **Smart Klick Ceiling Bracket** 10182..000
"Klicks" onto track, powder coated. 100/box
Install with VK screw 4 mm.


 **Smart Klick Wall Bracket** 50/box
3,5 cm (13/8") and 6 cm (23/8").
"Klicks" onto track, powder coated. One screw attachment. 10202..035
For light weight use only. 10202..060


 **Aluminium Wall bracket** 10203..mm
Smart klick, powder coated.
7,5 cm single (3") 20/box
10 cm single (4") 20/box
15 cm double (6") 15/box
20 cm double (8") 15/box
25 cm triple (10") 10/box

 **Compact Bending tool** 1050000000
For DS 1/each
DS Bending Wheel All-in 2050000000
For DS incl. strips 1/each

 **Electric powered bender** 1060500000
Available in 220V or 110V, to create continuous curves and arches. Minimum radius 50 cm (20"). 1/box

 **Replacement Bending Strips** 2060100000
For DS Compact Bending Tool. 1/set
Length of strip: 60 cm (23").
For DS electric powered bender. 2060300000
Length of strip: 7 mtr. (23') 1/set

 **Bending wheels** 2060700000
For electric powered bender. 1/set
Complete set of 3 wheels for DS track only. No arches can be made.

 **Electric powered railcutter** 1061100000
220 Volt EU 1061200001
110 Volt USA 1061200002
220 Volt UK 1/each
Replacement blade 1061200000
For electric powered railcutter. 1/each

Distributor:

FOREST
DRAPERY HARDWARE

FOREST
DRAPERY HARDWARE

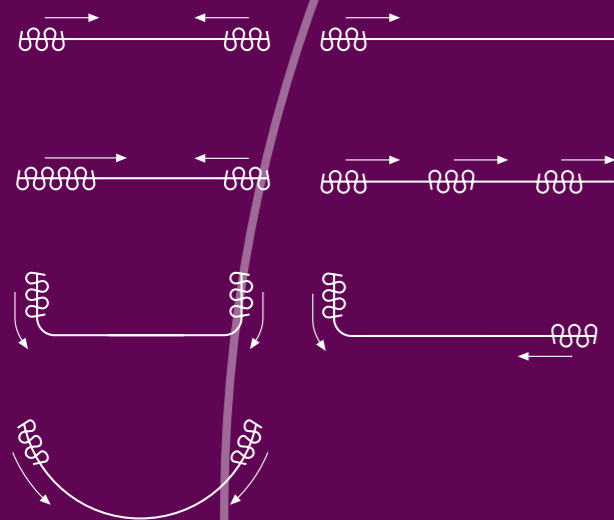


DS[®]
Design System

Product information

- Elegant and aesthetically pleasing hand drawn system for all types of medium weight draperies.
- Quick installation with "Smart Klick" brackets for wall and ceiling applications.
- Bendable; it can be curved for outside bends only using a 10 cm (4") radius or continuous curved.
- Hidden brackets through elegant shape of the track.
- Same brackets as used with KS system.
- Heavy duty clickable carriers - UV protected - for smooth and easy traversing. Offset shape for straight hanging pleats.
- Can also be used for ripplefold and accordiafold drapery systems.
- Maximum fabric weight: 4 kg per meter (3 LBS per ft.).
- Colours available: white and silver.
- Special colours: available on request.
- Available lengths: 4 meter (13'1"), 5 meter (16'4"), 6 meter (19'8"). • Track finish: chromated powder coated with a factory applied patented dry lubricant.
- Limited lifetime warranty.

Applications

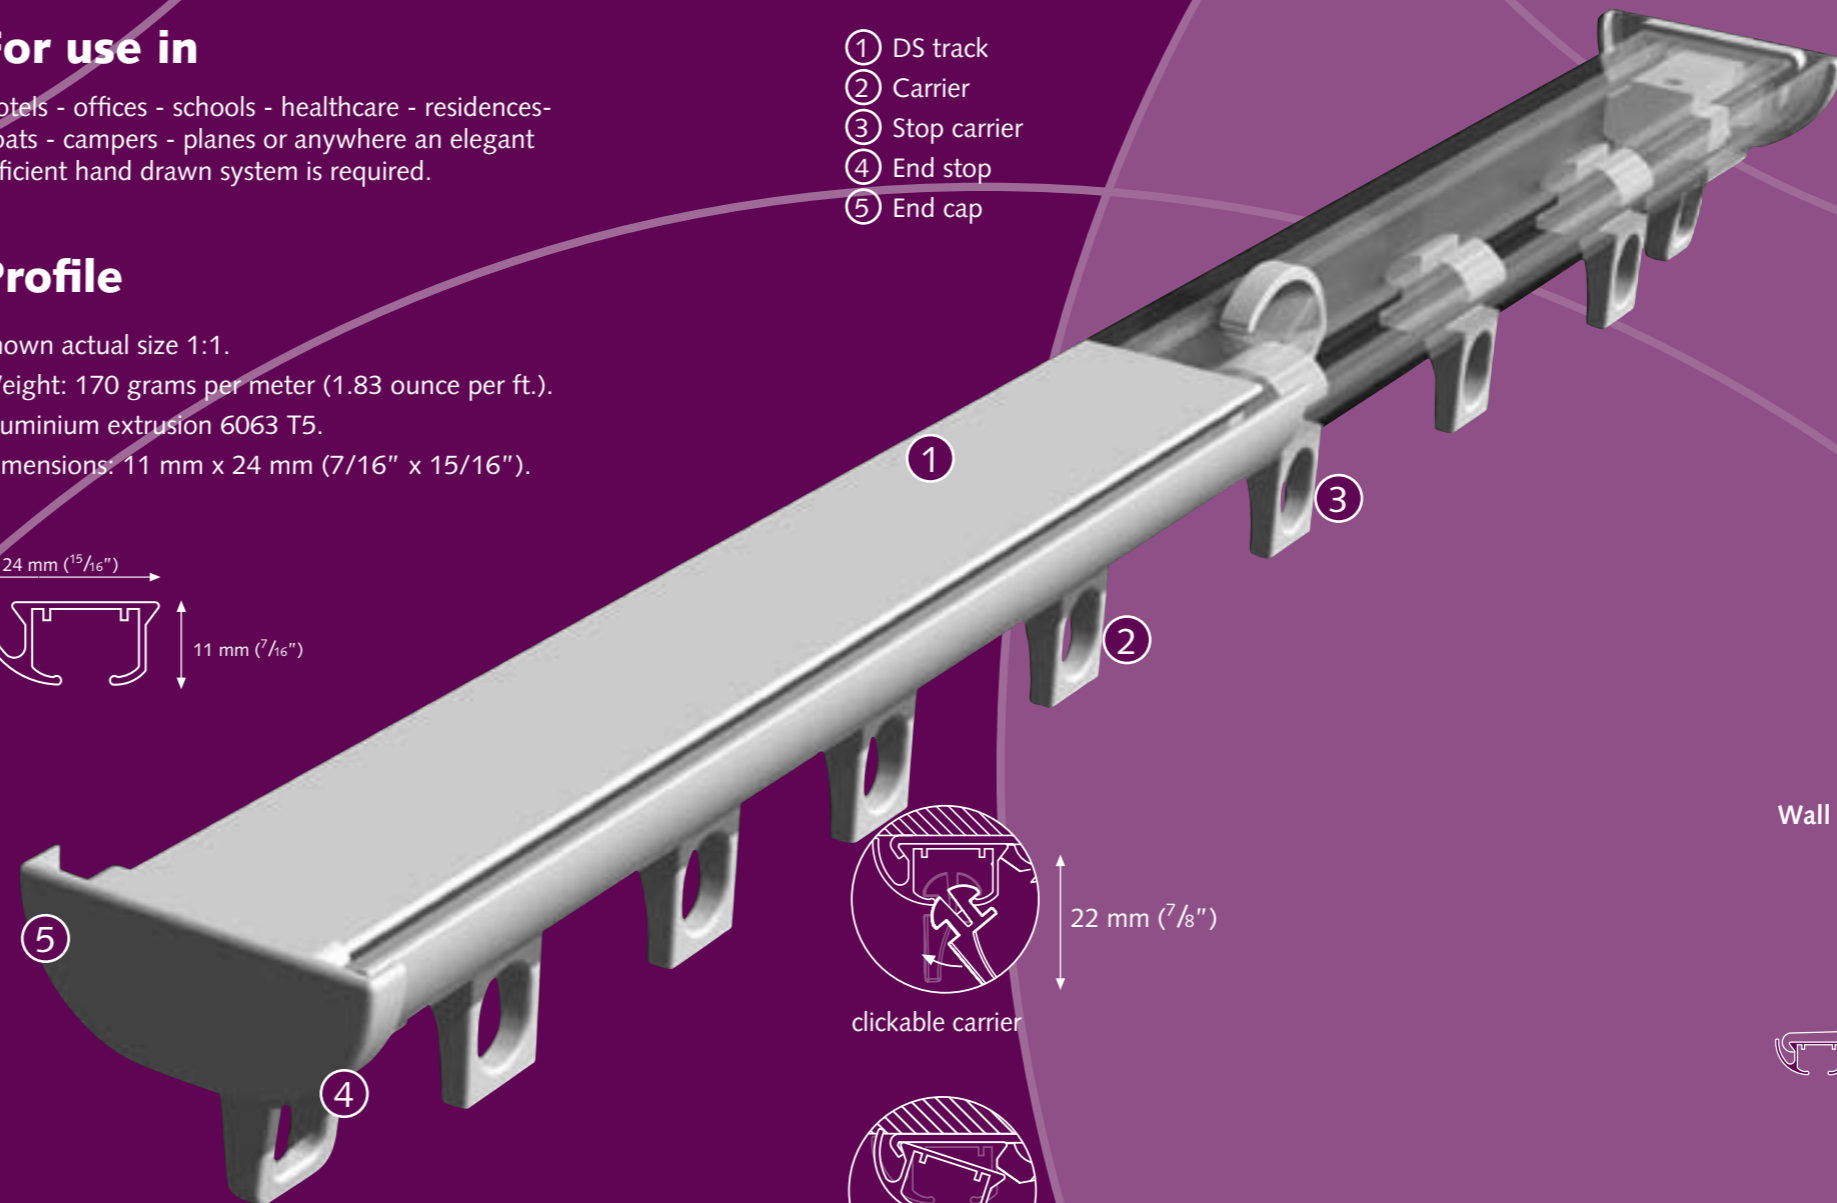
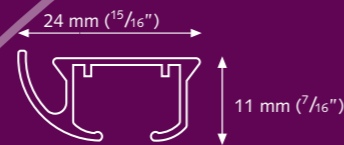


For use in

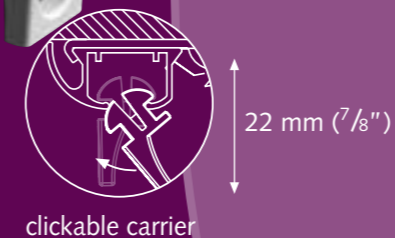
Hotels - offices - schools - healthcare - residences - boats - campers - planes or anywhere an elegant efficient hand drawn system is required.

Profile

Shown actual size 1:1.
 Weight: 170 grams per meter (1.83 ounce per ft.).
 Aluminium extrusion 6063 T5.
 Dimensions: 11 mm x 24 mm (7/16" x 15/16").



- 1 DS track
- 2 Carrier
- 3 Stop carrier
- 4 End stop
- 5 End cap



Bending/ curving


The track can be curved for outside bends only using a 10 cm (4") radius. Continuous curving is available by special order from factory only.



Bending instruction leaflet enclosed.

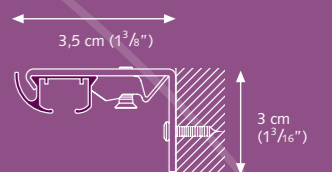
Mounting Brackets

Ceiling Bracket



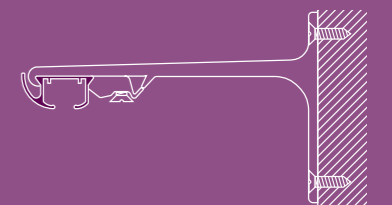
Wall bracket

3,5 cm (1 3/8")
6 cm (2 3/8")



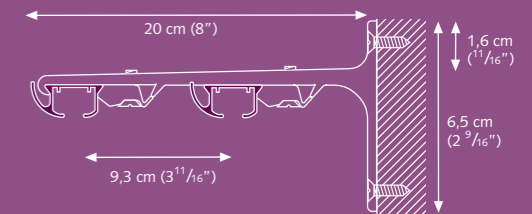
Wall bracket aluminium single

7,5 cm (3")
10 cm (4")
15 cm (6")



Wall bracket aluminium double

15 cm (6")
20 cm (8")



- Other brackets are available, see component listing and KS brochure.
- Two brackets at each end 60 cm (24") apart and up to 95 cm (36") over

remainder of track depending on weight of treatment.